
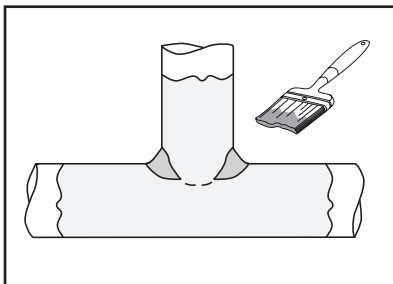


USING PREMTAPETM, PREMCOTETM AND PREMIERTM MOULDING COMPOUND or PREMTAPETM LD MASTIC

STAGE 1


Carry out surface preparation and priming according to the appropriate 'Instructions for Use' for the system to be applied.

To facilitate easy tape wrapping and prevent air entrapment, build up the profile around the shoulders with Premier Moulding Compound or Premtape LD Mastic. Where the T-branch is of smaller diameter than the main line pipe it may be necessary to fully encircle the T-branch intersection with the mastic.

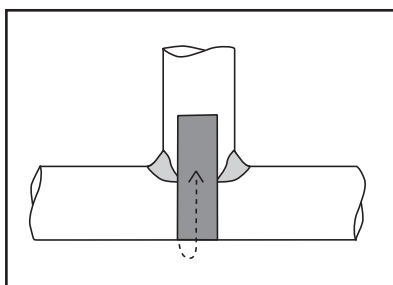


STAGE 2

Measure and cut a length of tape and apply centrally around the main line pipe in the form of a U shape extending equally either side on to the branch.

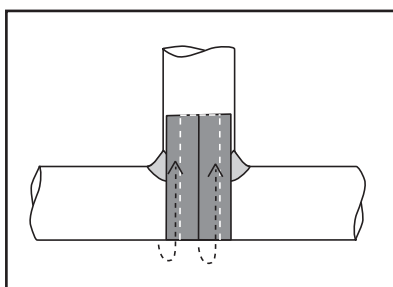


STAGE 3

Repeat with further lengths of tape to fully cover the area shown and to ensure a double layer thickness. Further smaller patches of tape may be applied over the shoulders if necessary.

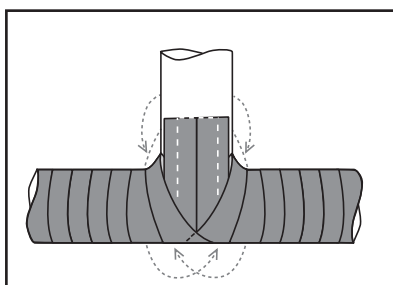

STAGE 4

Applying tape directly from the roll spirally with a 55% overlap, wrap the main line pipe moving towards the joint. Take the wrap up to and onto the profiled shoulder, here gradually increasing the diagonal to overlap onto the previously applied pieces before taking the tape diagonally around the main line pipe up to the opposite shoulder. Repeat this process several times back and forth in cross over fashion before continuing the wrap on the main line on the other side of the joint. (This cross over procedure may not be possible as a single tape run when wrapping with medium or heavy duty Premcote Tapes - separate lengths of tape may need to be used)

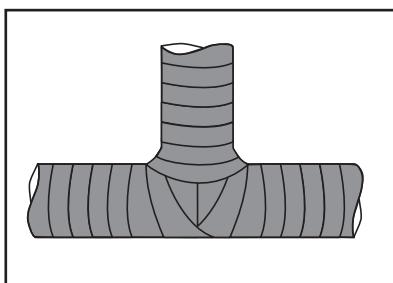

STAGE 5

Finally wrap the T-branch spirally with a 55% overlap such that the ends of the tape pieces are covered and the shoulder areas overlapped circumferentially as close as possible to the intersection. This operation may be carried out prior to wrapping the main line pipe if this is more convenient. Finally, inspect the completed wrap to ensure double layer thickness and absence of voids.

IMPORTANT:

Premier Coatings Ltd pursue a policy to develop and continually improve all of our products and therefore information given in these instructions for use is intended as a general guide and does not constitute a warranty, specification or risk assessment. Instructions for use are intended to provide sufficiently detailed information to achieve successful installation in normal circumstances. These guidelines may not cover all circumstances; however, our sales personnel are committed to assisting the user in establishing the suitability of the product for its intended purpose and additional specific information, advice and training (including Safety Data Sheets) is available. It is strongly recommended that installation is conducted with due regard to Health and Safety using a safe system of work, including risk method statements, in accordance with relevant local statutes and regulations. Equipment used for installation must be suitable for the intended use, maintained in a safe assessments and condition, inspected for signs of deterioration, and used by competent personnel. Any conflict between these guidelines and the specific project specifications must be resolved by the user before work commences. All rights reserved.