

## INSTRUCTIONS FOR USE

COVERING ORIGINAL AND HT VERSIONS

### USE

For profiling around irregular shaped pipe fittings particularly where deep fillings are required. It is used with primer prior to overwrapping with PREMTAPE™, PREMCOTE™ or PREMCOTE R™ TAPES for the long term corrosion protection of buried pipe fittings.

### SURFACE PREPARATION

Surfaces must be clean, dry and dust-free. Remove all loose rust, scale and flaking coatings by scraping, wire brushing or blast cleaning.

### PRIMING

Apply appropriate primer for tape (e.g. PREMPASTE™ or PREMIER HITACK™ PRIMER for PREMTAPE™ or PREMCOTE™ PRIMER for PREMCOTE™ or PREMCOTE R™ cold applied laminate tapes). Apply PREMPASTE by gloved hand, PREMIER HITACK PRIMER or PREMCOTE PRIMER by brush in a thin layer over the entire surface including threads, crevices and pitted areas.


### APPLICATION

Press PREMTAPE™ LD MASTIC into cavities, angles and around bolt heads to form a profile suitable for wrapping with tape without forming bridges or voids.

### OVERWRAPPING

PREMTAPE LD MASTIC must be wrapped with an anti-corrosion tape to complete protection. See 'Instructions for Use' or the particular tape.

Diagram of the correct application procedure.

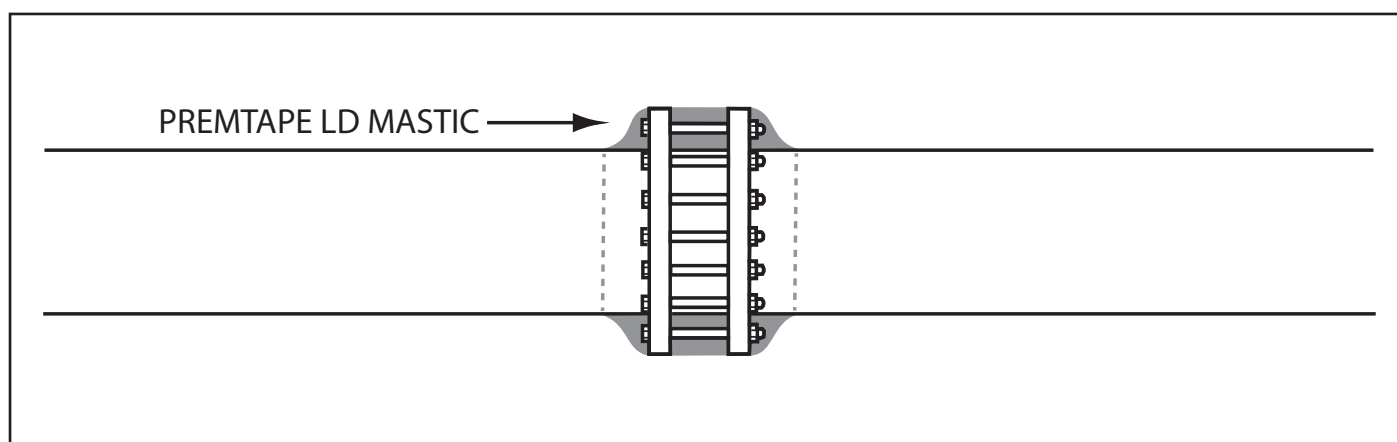

# INSTRUCTIONS FOR USE

COVERING ORIGINAL AND HT VERSIONS

## STORAGE

Store correct way up in original packaging.  
Store in a cool dry place away from heat and open flames.

## TRANSPORT

No special precautions necessary.

## HANDLING

- Grease resistant gloves are advised to reduce skin contact.
- Avoid contact with arms and face etc
- Wash thoroughly with soap and water after use and before work breaks to remove compound from the skin.
- Careful attention should be given to personal hygiene.
- Change and clean soiled clothing

## ACTION IN CASE OF..

**FIRE:** Extinguish with dry powder, carbon dioxide or chemical foam. Use air breathing equipment in case of large fires in confined spaces

**SKIN CONTACT:** Wash with warm water and mild soap.

**EYE CONTACT:** Irrigate eyes thoroughly with clean water.

**SWALLOWING:** Obtain medical advice if necessary.

## DISPOSAL

Please minimise or avoid waste wherever possible. Please do not discard waste material, including packaging, in the surrounding environment. Follow all relevant legislation for disposal.

### IMPORTANT:

Premier Coatings Ltd pursue a policy to develop and continually improve all of our products and therefore information given in these instructions for use is intended as a general guide and does not constitute a warranty, specification or risk assessment. Instructions for use are intended to provide sufficiently detailed information to achieve successful installation in normal circumstances. These guidelines may not cover all circumstances; however, our sales personnel are committed to assisting the user in establishing the suitability of the product for its intended purpose and additional specific information, advice and training (including Safety Data Sheets) is available. It is strongly recommended that installation is conducted with due regard to Health and Safety using a safe system of work, including risk method statements, in accordance with relevant local statutes and regulations. Equipment used for installation must be suitable for the intended use, maintained in a safe assessments and condition, inspected for signs of deterioration, and used by competent personnel. Any conflict between these guidelines and the specific project specifications must be resolved by the user before work commences. All rights reserved.