

STEELCOAT 100™ SYSTEM



A petrolatum tape system for the protection of above ground pipe and steelwork

The Steelcoat 100™ System comprises an adhesive petrolatum primer (Premtape™ Hi-Tack Primer) and a very adhesive petrolatum tape (Premtape™ Hi-Tack). For damp or low temperature pipework, Prempaste S105™ replaces the Premtape Hi-Tack Primer.

For pitted or badly rusted structural steel and pipework applications, Premtape Hi-Tack Primer and Tape are utilised in conjunction with a petrolatum mastic for sealing voids and fittings (Premtape™ LD Mastic).

Where additional insulation is required, Premfil™ is utilised to seal flanges and voids prior to tape wrapping.

FEATURES

- Cold applied
- Surface tolerant
- Useful for damp/low temperature surfaces
- Useful for pitted or badly rusted surfaces
- Can be applied by hand or wrapping machine

COMPONENTS

For badly pitted/rusted structural steel and pipework:

Premtape™ Hi-Tack Primer

Premtape™ Hi-Tack

Premtape™ LD Mastic

For sealing voids and fittings.

For damp/low temperature pipework:

Prempaste S105™


Premtape™ Hi-Tack

Premfil™

For sealing/insulating flanges and voids.

SURFACE PREPARATION

Minimal surface preparation required. Surfaces must be clean and dry. Remove all loose rust, scale and flaking coatings by hand wire brush.

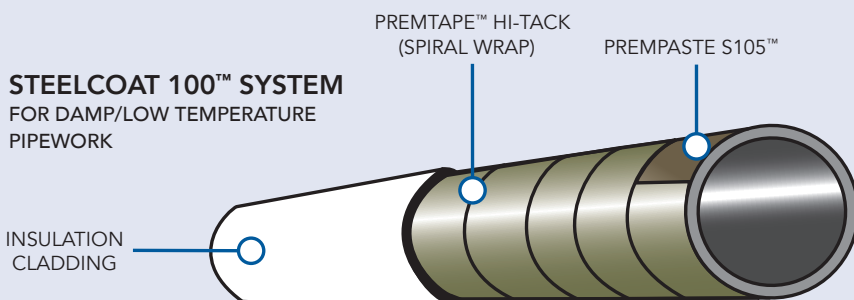

PUB No. 508.05.2021



Q 09303 | EMS 677780
ISO 9001:2015 & ISO 14001:2015

PREMIER COATINGS LIMITED

TEL: +44 (0) 1233 770 663

EMAIL: enquiries@premiercoatings.com

WEB: www.premiercoatings.com

Headcorn Rd Smarden, Ashford

TN27 8PJ

UNITED KINGDOM

